


300/500 V 70°C PVC INSULATED AND SHEATHED

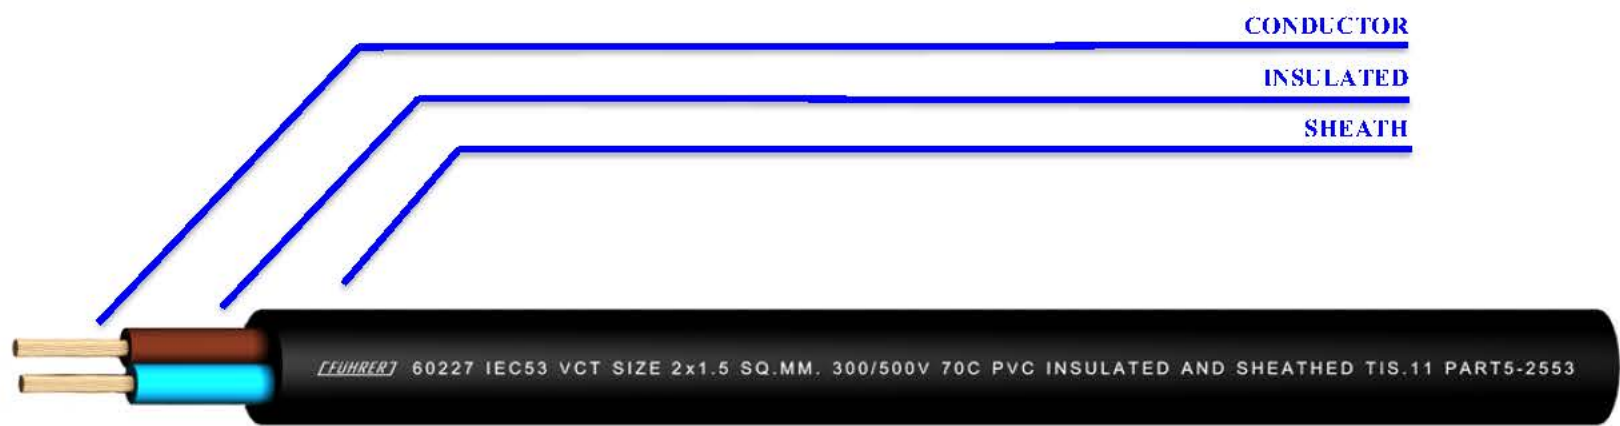

CONDUCTOR : Flexible stranded annealed copper wire
Size 0.75 mm² up to Size 2.5 mm²

CLASSIFICATION : Maximum conductor temperature 70°C
Circuit voltage not exceeding 500 volt

INSULATION : Polyvinyl chloride (PVC)
2 cores Light Blue , Brown
3 cores Brown , Black , Grey
4 cores Light Blue ,Brown , Black , Grey

TESTING VOLTAGE : 2,000 VAC
REFERENCE STANDARD : TIS.11 PART 5-2553

Sheath : Polyvinyl chloride (PVC) : Black colour

Nominal Cross Sectional area (mm ²)	No. of core	Conductor		thickness of Insulation (mm)	thickness of Sheath (mm)	Overall Diameter		Maximum continuous current rating in free air (A)	Minimum insulation resistance at 70°C (MΩ-Km)	cable weight (approx.) (Kg/Km)	standard length (m)
		Diameter of wires (Max.)	Diameter (mm) (Approx.)			Lower Limit (mm)	Upper Limit (mm)				
0.75	2	0.21	1.13	0.6	0.8	5.7	7.2	6	0.011	63	100/C
1	2	0.21	1.31	0.6	0.8	5.9	7.5	10	0.010	72	100/C
1.5	2	0.26	1.58	0.7	0.8	6.8	8.6	16	0.010	96	100/C
2.5	2	0.26	2.04	0.8	1.0	8.4	10.6	25	0.009	150	100/C

0.75	3	0.21	1.13	0.6	0.8	6.0	7.6	6	0.011	74	100/C
1	3	0.21	1.31	0.6	0.8	6.3	8.0	10	0.010	87	100/C
1.5	3	0.26	1.58	0.7	0.9	7.4	9.4	16	0.010	120	100/C
2.5	3	0.26	2.04	0.8	1.1	9.2	11.4	20	0.009	190	100/C

0.75	4	0.21	1.13	0.6	0.8	6.6	8.3	6	0.011	91	100/C
1	4	0.21	1.31	0.6	0.9	7.1	9.0	10	0.010	110	100/C
1.5	4	0.26	1.58	0.7	1.0	8.4	10.5	16	0.010	150	100/C
2.5	4	0.26	2.04	0.8	1.1	10.1	12.5	20	0.009	230	100/C

C:Packing in coil.